

HL-CR0210 2组弱电窗帘模块



HL-CR0210

性能特点:

- 全铝注塑机身，体积小，非常适合隐藏式安装；
- LED数码管状态指示各个窗帘状态；
- 具有2组独立窗帘控制；
- 自带应急按键；
- 可设置通电后各组窗帘状态；
- 采用HL-Net总线通信；

性能描述:

体积小可安装在86盒内，可控制2组弱电接口窗帘电机，实现窗帘打开、关闭、停止操作；

Performance Description

The product has small size. It can be installed in standard 86 box. It can control 2 sets of curtain motor with weak power interface. It can achieve curtain's opening, closing and stopping operation;

Performance Characteristics

- Aluminum injection molding, compact size, very suitable for hidden type installation;
- LED digital tube displays the status of each curtain;
- 2 groups of independent curtain control;
- With emergency button;
- Can set up the state for each group of curtain after power is on;
- Communicated by HL-Net Bus;

技术参数:



- 供电电源:DC24V 100mA;
- 输出回路:2组窗帘;
- 控制按键:4×轻触式按键;
- 地址:3位数码管、00-63;
- 运行温度/湿度:0℃~45℃/20%~93%RH;
- 储存温度/湿度:-40℃~+55℃/10%~93%RH;
- 外观尺寸:42mm(L)×63mm(W)×22mm(H);
- 重量:134g/pcs;

Technical Parameters

- Power Supply:DC24v 100mA;
- Output channel:2 groups of curtain;
- Control Button:4×Touch key;
- Address:3 Bit digital tube、00-63;
- Working Temp/Relative Humidity : 0℃~45℃/20%~93%RH;
- Storage Temp/Relative Humidity : -40℃~+55℃/10%~93%RH;
- Dimension : 42mm(L)×63mm(W)×22mm(H);
- Weight : 134g/PCS;

产品尺寸图 (量度单位:毫米)

Product size (Unit :mm)

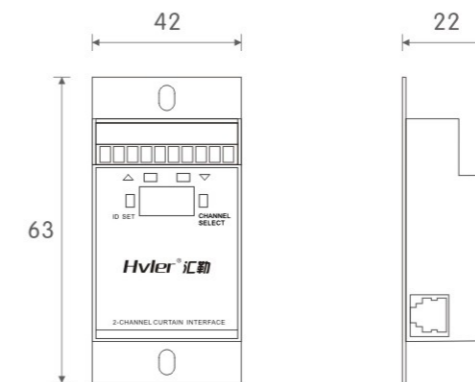

接线原理图 Wiring principle

